


Keysight Technologies

N9398C/F/G and N9399C/F DC Block

Technical Overview



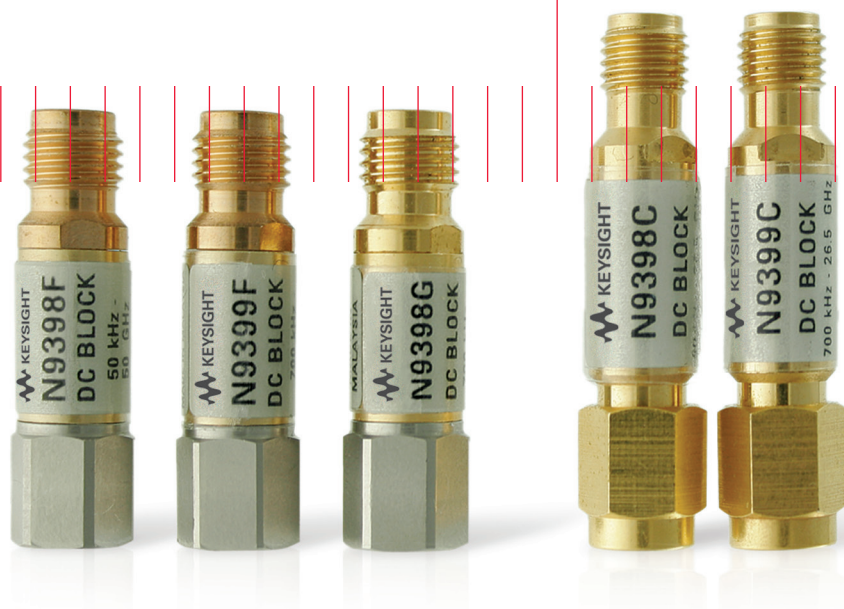

Introduction

Key Features

- Maximize your operating range - 26.5, 50 or 67 GHz
- Improve calibration accuracy with exceptional return loss >15 dB at 67 GHz
- Maximum available power with < 0.9 dB insertion loss
- 2 choices of DC voltage ratings for a wide range of applications

Description

The Keysight Technologies, Inc. N9398C/F/G and N9399C/F DC blocks offer a new level of DC blocking with broadband performance specified from 50 kHz right up to 67 GHz. Designed to apply AC drive signals to a device while eliminating any DC voltage or current components, these DC blocks feature a broad frequency range, excellent return loss, very low insertion loss and excellent temperature stability. Precision coaxial connector interfaces ensure an excellent impedance match across wide bandwidths, and come in a variety of RF coaxial connector types (3.5 mm, 2.4 mm and 1.85 mm) to meet your application needs.

The Keysight N9398C/F/G and N9399C/F DC blocks are assembled and tested on Keysight precision network analyzers to assure full specifications over their entire frequency range.

Applications

Ruggedness and reliability make these DC blocks suitable for use on the bench and in systems. With low SWR and Insertion loss, they are ideally suited for suppressing DC signals which may affect the accuracy of your microwave and RF measurements or even damage your instruments.

The N9398C/F/G and N9399C/F DC blocks place the capacitance in series with the center conductor, preventing DC signals from flowing along the center conductor which can inadvertently bias other active components. These DC blocks provide good value with excellent broadband performance from 50 kHz to 50 GHz and 700 kHz to 67 GHz at a reasonable cost.

Sample Applications:

1. Amplifier Biasing

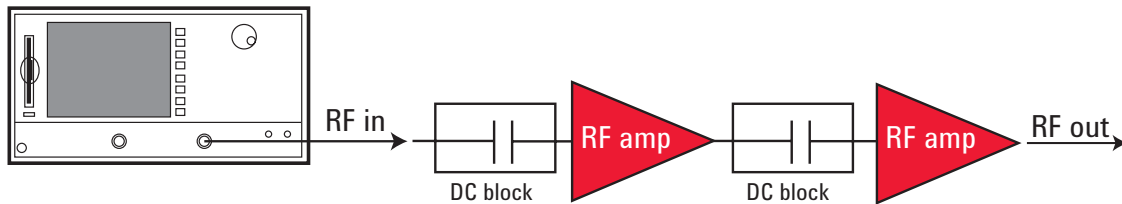


Figure 1. Typical application

DC blocks help prevent any DC signals entering the amplifier and creating a DC offset by acting as a high pass filter. A DC block also can be placed in between two RF amplifier stages to prevent any DC signal from the 1st stage entering the next amplifier stage.

2. Surge Arrestor




Figure 2. Typical application

Telecommunications based customers may use the DC blocks as surge arrestors before the incoming coaxial data lines are fed into their systems. Here the DC block protects the receiver circuit from any instantaneous voltage surge by absorbing the excess voltage.

Specifications

Specifications describe the product's warranted performance. Supplemental and typical characteristics are intended to provide typical but non-warranted performance parameters. These are denoted as "typical", "nominal" or "approximate".

| Model | N9398C | N9399C | N9398F | N9399F | N9398G |
|------------------------|--------------------------|-----------------------------|--|-----------------------------|---|
| Frequency range | 50 kHz to 26.5 GHz | 700 kHz to 26.5 GHz | 50 kHz to 50 GHz | 700 kHz to 50 GHz | 700 kHz to 67 GHz |
| Insertion loss | 0.9 dB | 1.2 dB | 0.9 dB (50 kHz to 26.5 GHz) 1.0 dB (26.5 to 50 GHz) | 1.2 dB | 0.9 dB (700 kHz to 26.5 GHz) 1.0 dB (26.5 to 67 GHz) |
| Return loss | 10 dB (50 to 300 kHz) | 10 dB (700 kHz to 2 MHz) | 10 dB (50 to 300 kHz) | 10 dB (700 kHz to 2 MHz) | 10 dB (700 kHz to 2 MHz) |
| Rise time | 3 ps (typical) | 3 ps (typical) | 2 ps (typical) | 2 ps (typical) | 2 ps (typical) |
| Group delay | 118 ps (typical) | 118 ps (typical) | 78 ps (typical) | 78 ps (typical) | 76 ps (typical) |
| Max DC working voltage | 16 V | 50 V | 16 V | 50 V | 16 V |
| Connector type | 3.5 mm (m-f) | 3.5 mm (m-f) | 2.4 mm (m-f) | 2.4 mm (m-f) | 1.85 mm (m-f) |
| Max RF power* | 1 W average | 1 W average | 1 W average | 1 W average | 1 W average |

* Max peak power = $\frac{\text{Max average power}}{\text{Duty cycle}}$ with condition of pulse width less than 1 us

Environmental Specifications

The N9398C/F/G and N9399C/F DC blocks are designed to fully comply with Keysight RF network and spectrum analyzers operating within environmental specifications. The following summarizes the environmental specifications for these products.

Temperature

| | |
|-----------|---|
| Operating | -25° C to +80° C (N9398C/F/G), -50° C to +100° C (N9399C/F) |
| Storage | -65° C to +115° C (N9398C/F, N9399C/F), -55° C to +100° C (N9398G) |
| Cycling | -65° C to +115° C (N9398C/F, N9399C/F), -55° C to +100° C (N9398G), 10 cycles @ 20° C per minute, 20 minutes dwell time per MIL-STD-833F, Method 1010.8, Condition C (modified) |

Humidity

| | |
|-----------|---|
| Operating | 50% to 95% RH @ 40° C, 24 hour cycling, 5 times |
|-----------|---|

Shock

| | |
|---------------------|---|
| Half-sine, smoothed | 1000 G @ 0.5 ms, 3 shock pulses per orientation, 18 total per MIL-STD-833F, Method 2002.4, Condition B (modified) |
|---------------------|---|

Vibration

| | |
|------------------|--|
| Broadband random | 50 to 2000 Hz, 7.0 G rms, 15 minutes, per MIL-STD-833F, Method 2026-1 (modified) |
|------------------|--|

Altitude

| | |
|---------|-------------------------------|
| Storage | < 15,300 meters (50,000 feet) |
|---------|-------------------------------|

Mechanical Dimensions

| Model | Weight |
|----------|------------------|
| N9398/9C | 0.1kg (0.22 lbs) |
| N9398/9F | 0.1kg (0.22 lbs) |
| N9398G | 0.1kg (0.22 lbs) |

DC blocks N9398C and N9399C

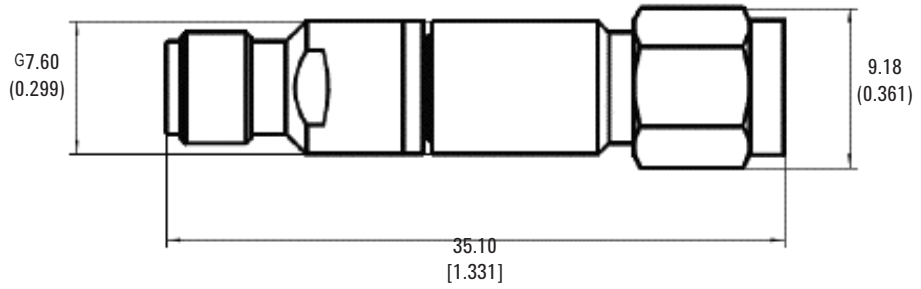


Figure 3. N9398/99C product outline

DC blocks N9398F and N9399F

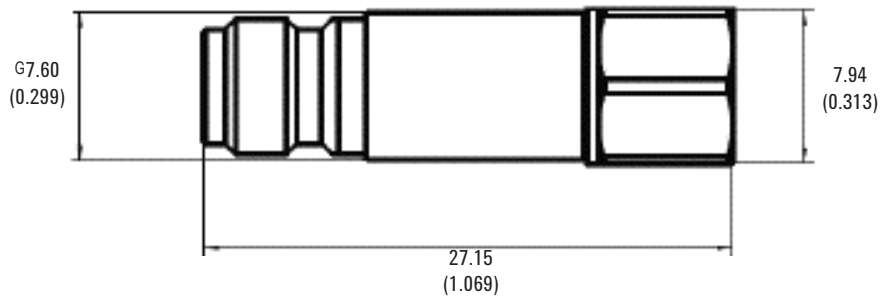


Figure 4. N9398/99F product outline

DC block N9398G

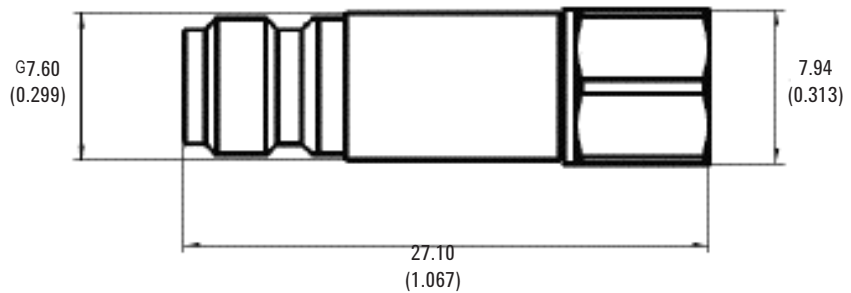


Figure 5. N9398G product outline

Dimensions are in mm (inches) nominal, unless otherwise specified.

Typical Performance

N9398C DC block return and insertion loss

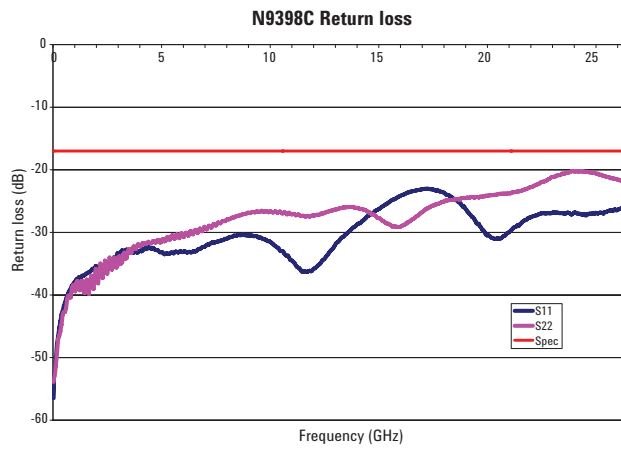


Figure 6. N9398C typical return loss versus frequency

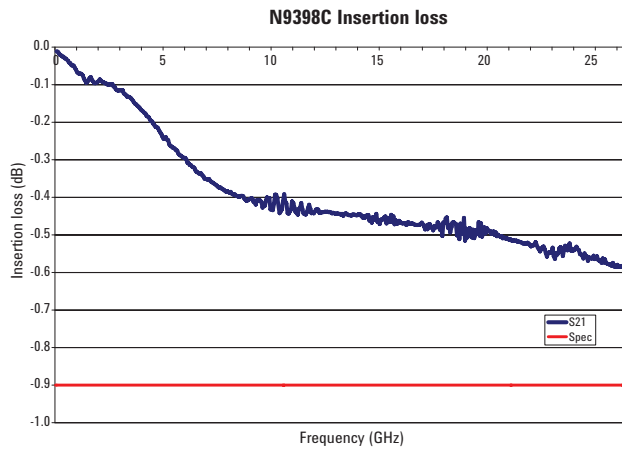


Figure 7. N9398C typical insertion loss versus frequency

N9399C DC block return and insertion loss

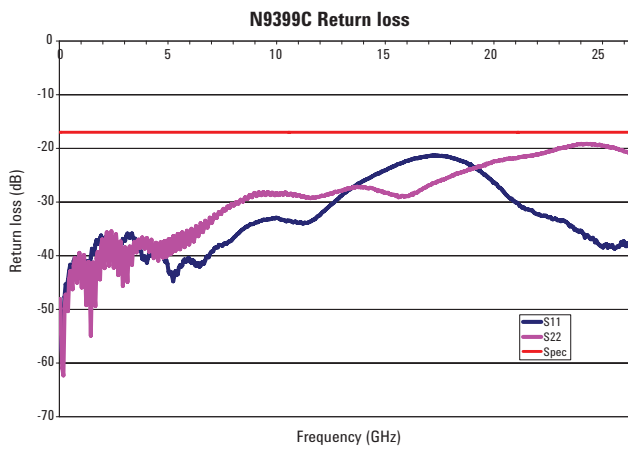


Figure 8. N9399C typical return loss versus frequency

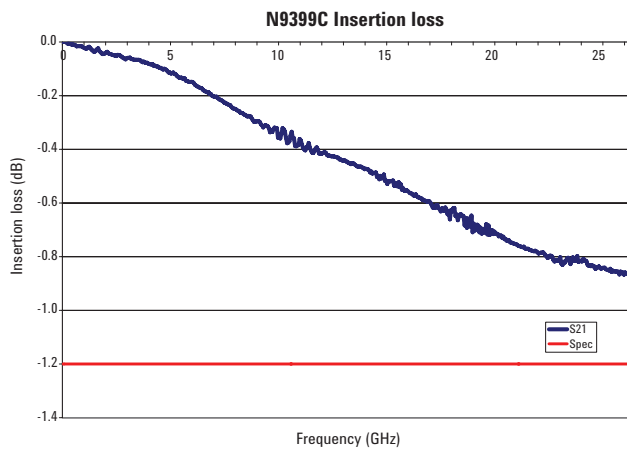


Figure 9. N9399C typical insertion loss versus frequency

Typical Performance – Continued

N9398F DC block return and insertion loss

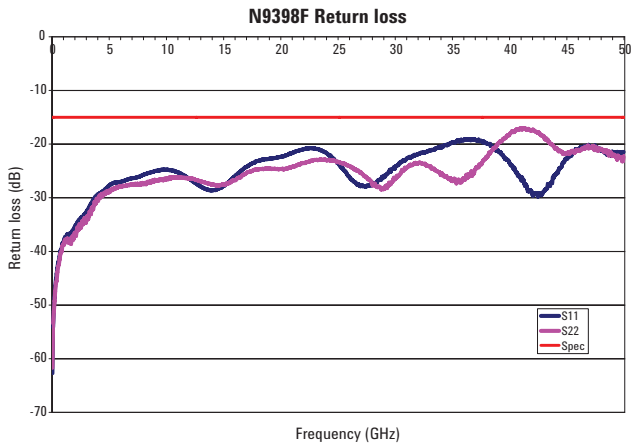


Figure 10. N9398F typical return loss versus frequency

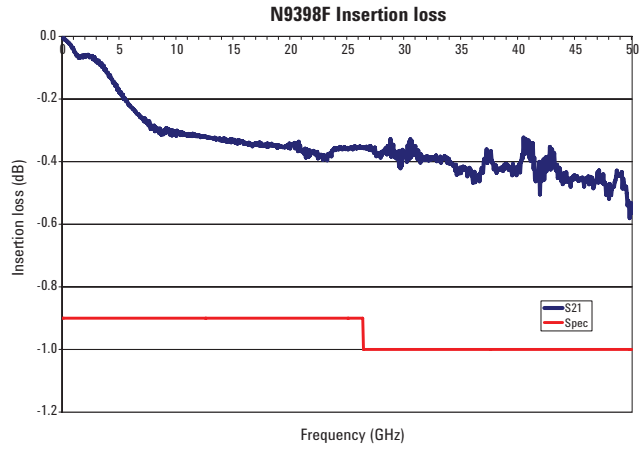


Figure 11. N9398F typical insertion loss versus frequency

N9399F DC block return and insertion loss

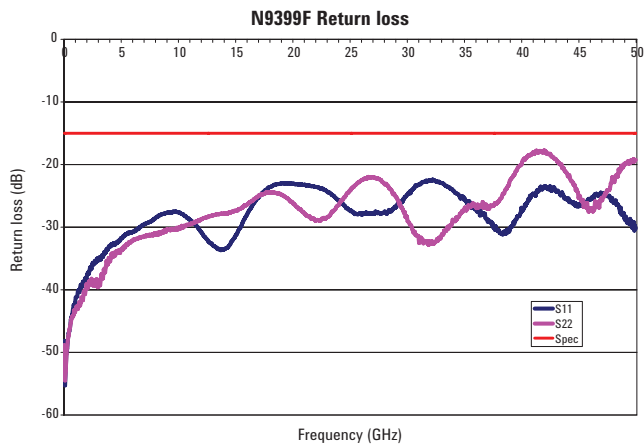


Figure 12. N9399F typical return loss versus frequency

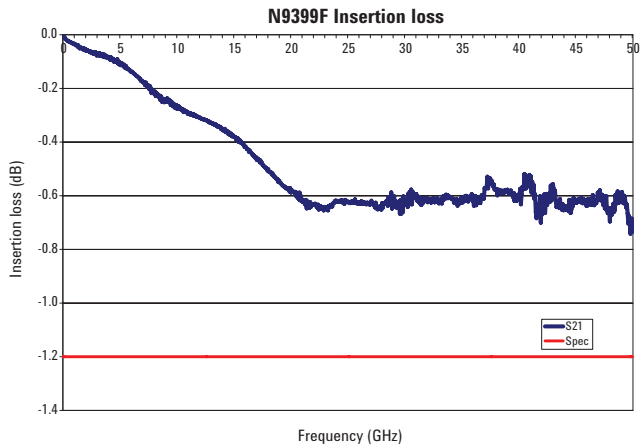


Figure 13. N9399F typical insertion loss versus frequency

Typical Performance – Continued

N9398G DC block return and insertion loss

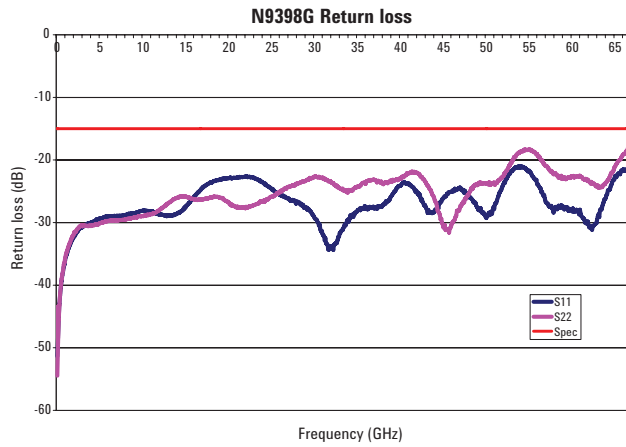


Figure 14. N9398G typical return loss versus frequency

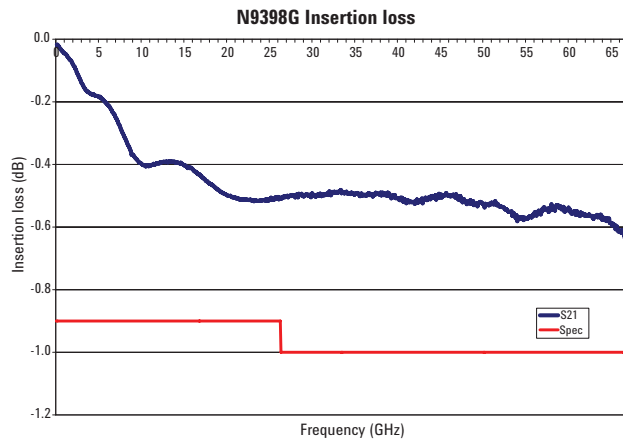


Figure 15. N9398G typical insertion loss versus frequency

Typical group delay

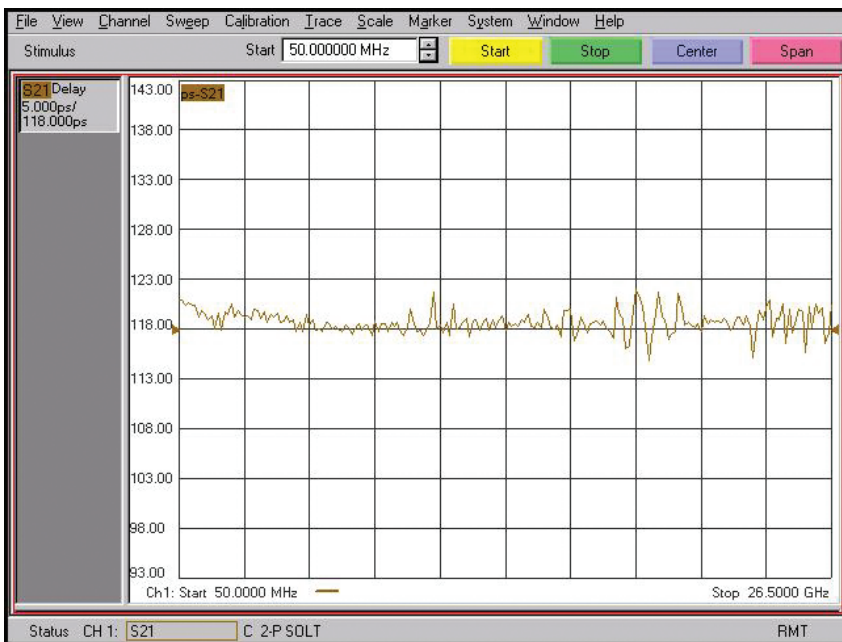


Figure 16. N9398C typical group delay

Typical Performance – Continued

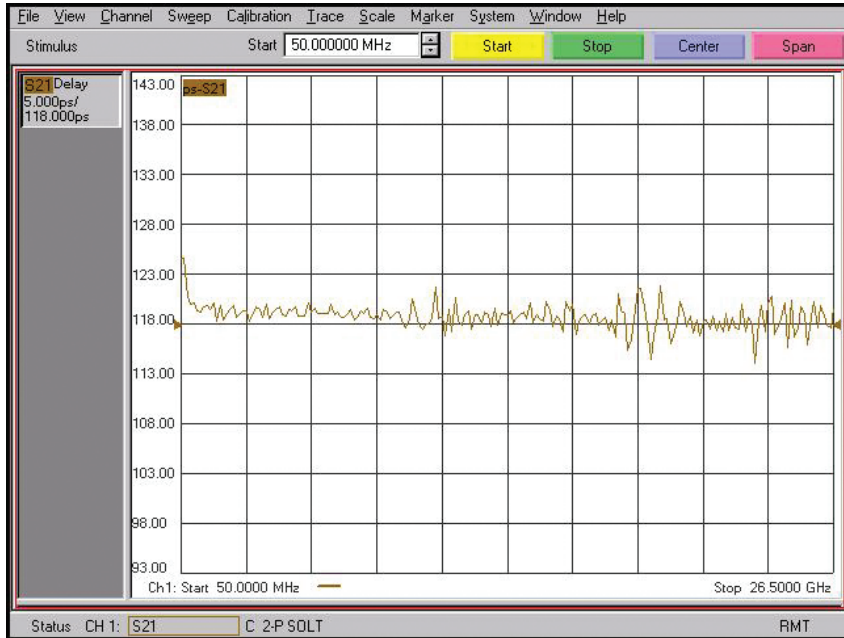


Figure 17. N9399C typical group delay

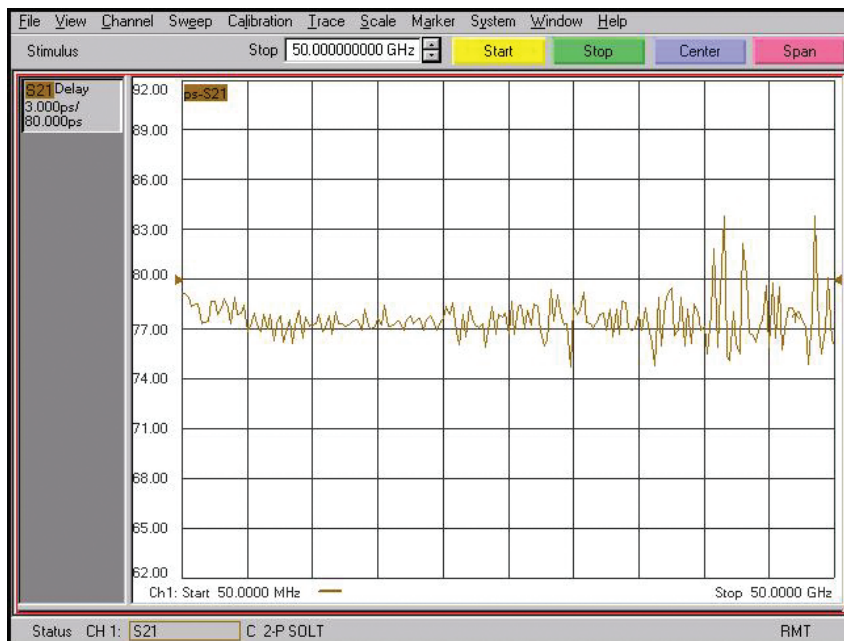


Figure 18. N9398F typical group delay

Typical Performance – Continued

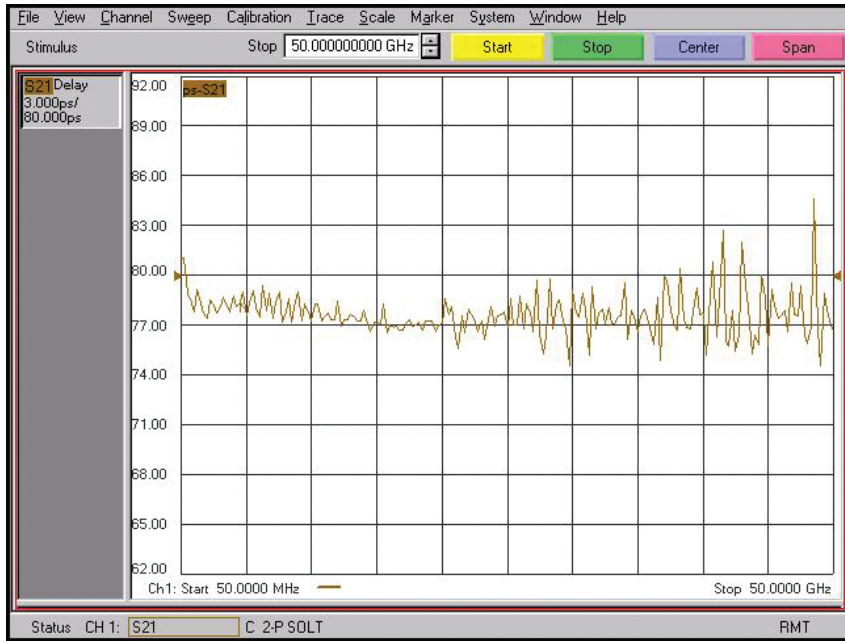


Figure 19. N9399F typical group delay

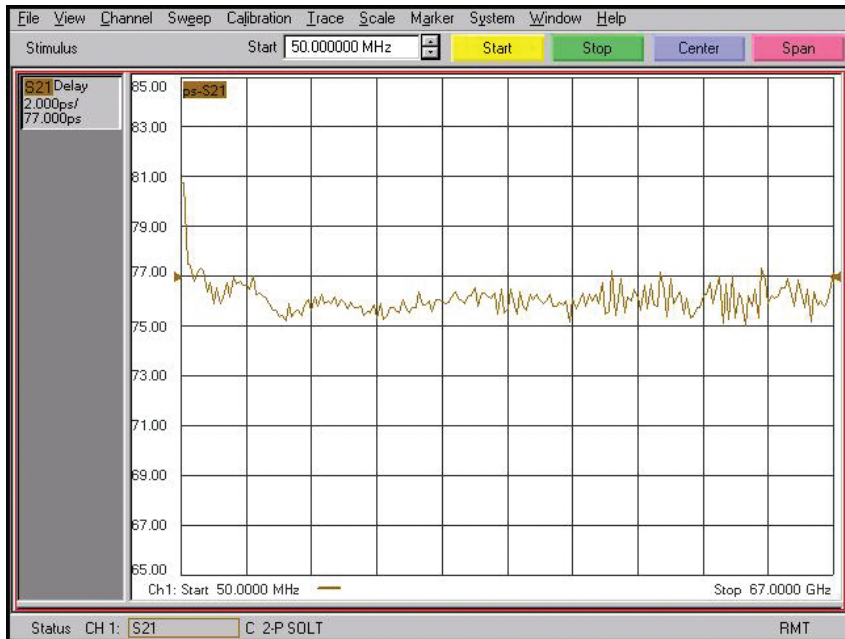


Figure 20. N9398G typical group delay

Ordering Information

| | |
|--------|--|
| N9398C | 3.5 mm, 16 V 50 kHz to 26.5 GHz, DC block |
| N9399C | 3.5 mm, 50 V 700 kHz to 26.5 GHz, DC block |
| N9398F | 2.4 mm, 16 V 50 kHz to 50 GHz, DC block |
| N9399F | 2.4 mm, 16 V 700 kHz to 50 GHz, DC block |
| N9398G | 1.85 mm, 16 V 700 kHz to 67 GHz, DC block |

Related Product Literature

Keysight N9398C/F/G and N9399C/F DC Blocks Flyer, literature number 5989-5519EN

Web Resource

www.keysight.com/find/mta



myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Keysight is a founding member of the LXI consortium.



www.keysight.com/quality

Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2008
Quality Management System

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/mta

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

| | |
|---------------|------------------|
| Canada | (877) 894 4414 |
| Brazil | 55 11 3351 7010 |
| Mexico | 001 800 254 2440 |
| United States | (800) 829 4444 |

Asia Pacific

| | |
|--------------------|----------------|
| Australia | 1 800 629 485 |
| China | 800 810 0189 |
| Hong Kong | 800 938 693 |
| India | 1 800 112 929 |
| Japan | 0120 (421) 345 |
| Korea | 080 769 0800 |
| Malaysia | 1 800 888 848 |
| Singapore | 1 800 375 8100 |
| Taiwan | 0800 047 866 |
| Other AP Countries | (65) 6375 8100 |

Europe & Middle East

| | |
|----------------|---------------|
| Austria | 0800 001122 |
| Belgium | 0800 58580 |
| Finland | 0800 523252 |
| France | 0805 980333 |
| Germany | 0800 6270999 |
| Ireland | 1800 832700 |
| Israel | 1 809 343051 |
| Italy | 800 599100 |
| Luxembourg | +32 800 58580 |
| Netherlands | 0800 0233200 |
| Russia | 8800 5009286 |
| Spain | 0800 000154 |
| Sweden | 0200 882255 |
| Switzerland | 0800 805353 |
| | Opt. 1 (DE) |
| | Opt. 2 (FR) |
| | Opt. 3 (IT) |
| United Kingdom | 0800 0260637 |

For other unlisted countries:
www.keysight.com/find/contactus
(BP-06-23-14)

